












ROUND/FLAT WEBBING SLINGS

Capacity kgs	Colour Code	WLL in kg with ONE Safelift round or webbing sling					WLL in kg with TWO slings			
		Lifting method					Lifting Method			
		Straight lift	Choke hitch	Basket inclination angle			straight up to 45°	choke up to 45°	straight from 45°-60°	choke from 45°-60°
up to 7°	up to 45°			from 45°-60°						
1000	 violet	1000	800	2000	1400	1000	1400	1120	1000	800
2000	 green	2000	1600	4000	2800	2000	2800	2240	2000	1600
3000	 yellow	3000	2400	6000	4200	3000	4200	3360	3000	2400
4000	 grey	4000	3200	8000	5600	4000	5600	4480	4000	3200
5000	 red	5000	4000	10000	7000	5000	7000	5600	5000	4000
6000	 brown	6000	4800	12000	8400	6000	8400	6720	6000	4800
8000	 blue	8000	6400	16000	11200	8000	11200	8960	8000	6400
10000	 orange	10000	8000	20000	14000	10000	14000	11200	10000	8000
12000	 orange	12000	9600	24000	16800	12000	14000	13440	12000	9600



Our flat webbing slings and round slings are made from high tensile polyester (PES) manufactured according to DIN 61360, offering the following advantages:


- Low weight, therefore offering easy handling.
- Protection against hand injuries.
- Protection against cargo surface damage.
- Highly flexible and adaptable to given shapes.
- Excellent adhesion when using PU sling coatings.
- Equal pressure distribution over tension and pressure sensitive loads.
- UV-resistant, eliminating material ageing or embrittlement.
- Heat resistant up to 120°C.
- Moisture-resistant fabric, preventing frost damage (down to -40°C).
- Low-strain, wear-resistant, long-life material (100% PES).

Flat webbing slings (BS EN 1492 - 1 : 2000)

- Duplex construction from PU-starched, thermally fixed web fabric.
- Colour coded as per current CEN standard.
- With soft sewn eyes (Becket eyes).
- Low elongation <4%.

Round slings (BS EN 1492 - 2 : 2000)

- Double-fabric outer casing PU-finished, thermally fixed.
- Colour coded as per current CEN standard.
- Printed-on capacities.
- Woven-in capacity stripes.

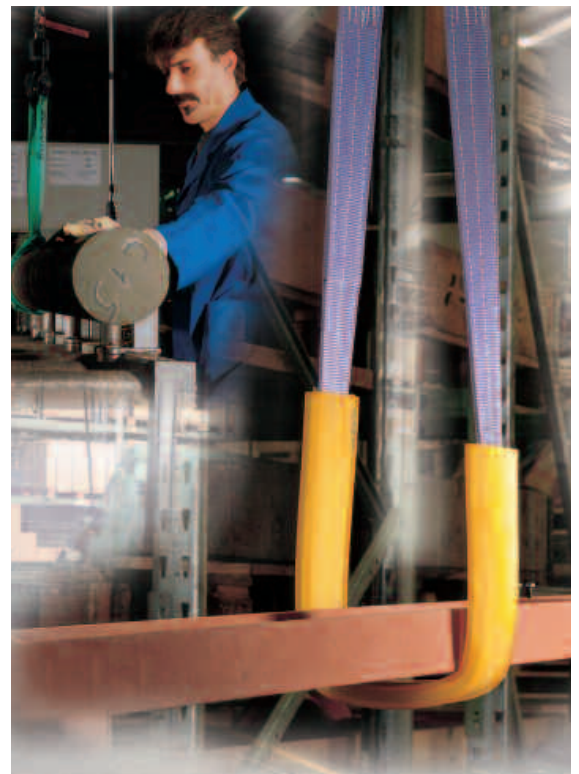

 Larger capacity round and webbing slings are available on request. Please call our sales team for further details.