




RT WEB RATCHET TENSIONER c/w CLAW HOOKS



A heavy-duty load restraint with LC* 2.5t (MBL 5000kg)
*LC, Lashing Capacity, is the maximum force for use in a straight pull.

Safe Web Ratchet Tensioners are manufactured with high strength webbing to LC 2.5t, 5000MBL - Beware of lower capacity equipment with LC 2.0t webbing.

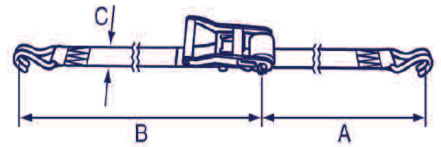

Product code	Description	C (Width) mm	B (Length) m	A mm
RTCC33004	Complete 500mm Short/Fixed End, 3.5m Long/Loose End, 5000kg MBL	50	3.5	500
RTCC33006	Complete 500mm Short/Fixed End, 5.5m Long/Loose End, 5000kg MBL	50	5.5	500
RTCC33008	Complete 500mm Short/Fixed End, 7.5m Long/Loose End, 5000kg MBL	50	7.5	500
RTCC33010	Complete 500mm Short/Fixed End, 9.5m Long/Loose End, 5000kg MBL	50	9.5	500
RTCC33012	Complete 500mm Short/Fixed End, 11.5m Long/Loose End, 5000kg MBL	50	11.5	500
RTLC04000	3.5m Long/Loose End Only, w/o Ratchet 5000kg MBL	50	3.5	
RTLC06000	5.5m Long/Loose End Only, w/o Ratchet 5000kg MBL	50	5.5	
RTLC08000	7.5m Long/Loose End Only, w/o Ratchet 5000kg MBL	50	7.5	
RTLC10000	9.5m Long/Loose End Only, w/o Ratchet 5000kg MBL	50	9.5	
RTLC12000	11.5m Long/Loose End Only, w/o Ratchet 5000kg MBL	50	11.5	
RTSC330	500mm Short/Fixed End Only, w/o Ratchet 5000kg MBL	50		500



RLSP LOAD BINDERS

Product code	WLL daN	Design type	Chain size mm	Weight kgs
LB 3750 PH	6300	Parallel hook	10	5.5




The Safelift load binder is a universal tool to restrain and secure loads and freight. Manual operation of the binder lever extends or retracts the threaded spindles. Clevis ends are for use with existing fastening devices or available with parallel hooks for direct attachment to chains.



SCGH 'Grade 8' SHOULDERLESS CLEVIS GRAB HOOK

Shoulderless Grade 8 Glevis Grab Hook for Loadbinders to EN1677



Complies fully with EN12195-3:2001 for use as a loadbinder chain-shortening device. NB: Do not use this hook for shortening lifting slings.

Product code	WLL kgs	Chain dia. mm	H mm	K mm	P mm	T mm	Weight kgs
G8GH10LB	3.2	10	26	73	11.9	27	0.9



LBC CHAIN FOR SAFELIFT CHAIN LOADBINDERS



Chain for Safelift Chain Loadbinders

Plain cut lengths of chain with or without fittings. Rossendale Group recommends the use of ratchet type tensioners and alloy steel chain. EN12195-3:2001 requires loadbinder chain to be EN818, chain fittings to EN1677.

Product code	Description	A mm	B mm	Weight kgs per m
LBG8GE10	10mm dia GD 8 Alloy Steel Chain to EN818, MBL 12600kg	30	13	2.2

