


Following the easy steps below you can specify the number of legs, hook type, shortening clutch requirement, leg length, chain diameter and safe working load.

**STEP 1.** Choose the number of legs you want:




**STEP 2.** Choose the hook type by selecting from the options below:

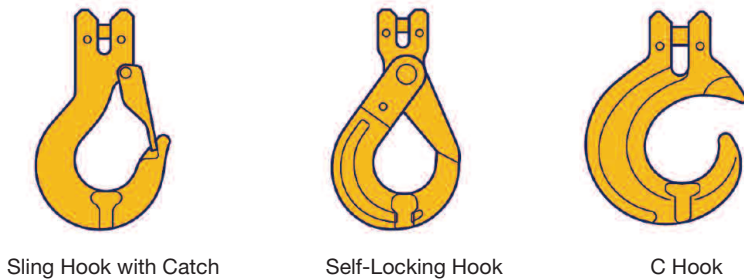

**STEP 3.** Do you want shortening clutches?



**STEP 4.** Specify the required leg length:

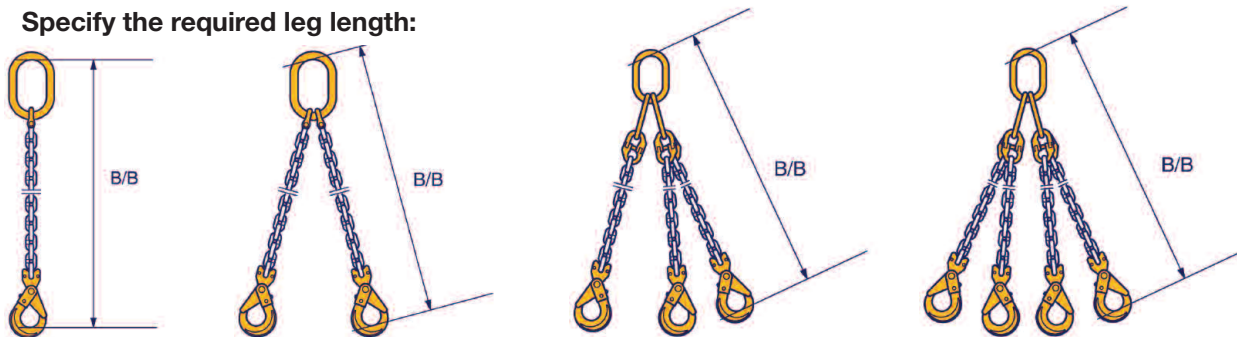

**\*STEP 5.** Specify the required chain diameter or SWL:

Chain Diameter	Single Leg	Two Leg		Three - Four Leg	
	90°	0° to 45°	0° to 45°	0° to 45°	0° to 45°
o 7mm	1500kg	2120kg	1500kg	3150kg	2240kg
o 10mm	3150kg	4250kg	3150kg	6700kg	4750kg
o 13mm	5300kg	7500kg	5300kg	11200kg	8000kg
o 16mm	8000kg	11200kg	8000kg	17000kg	11800kg
o 19mm	11200kg	16000kg	11200kg	23600kg	17000kg

**\* Correct specification of chain slings can involve technical issues and knowledge of the specific conditions of use. For more information go to [www.rossendalegroup.co.uk](http://www.rossendalegroup.co.uk) or contact your Rossendale Group branch!**