



CH/HH HORIZONTAL PLATE CLAMPS

'Best seller'

SOLD IN PAIRS

Industry standard horizontal plate clamps

Working load limit (WLL) 1000 - 10000kgs


The CH horizontal plate clamps have been specifically designed to be used, in pairs, for the transportation of plate bundles as well as single plates with a minimum thickness of 5mm.

A pair of clamps used with a two legged chain sling are suitable for small plates up to 1500mm in length. It is recommended to use two pairs in conjunction with a spreader beam for handling of larger plates. These units are supplied as standard with a smooth jaw. There is also the option of hardened steel teeth for special applications. Please contact our technical department for further details.


The HH horizontal plate clamps incorporate all of the features of the CH clamps, yet are manufactured from high strength steel giving them exceptionally low tare weights.

Workmanship and parts

These plate clamps are service-friendly, making it easy to exchange parts, which are available individually or in kits. Clamp repairs are available through Rossendale Group repair and test facilities.



* CH with serrated jaw

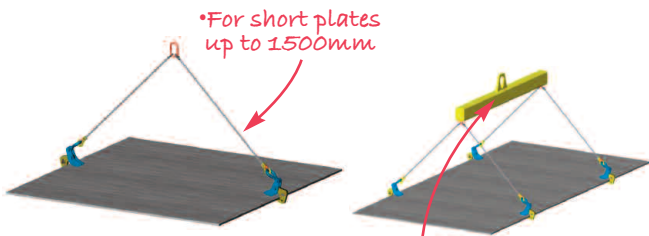

*For short plates up to 1500mm

*For long plates use spreader beam.

Model	Product code**	WLL kgs*	Jaw capacity mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kgs*
CH1	4300000041	1000	5 - 32	15	82	60	100	32	44	13	8
CH2	4300000047	2000	5 - 32	30	82	60	100	50	73	18	11
CH2L	4300000048	2000	20 - 50	30	82	60	100	50	73	18	12
CH4	4300000051	4000	5 - 50	40	112	80	100	64	92	25	17
CH4L	4300000052	4000	50 - 100	40	112	80	100	64	92	25	23
CH6	4300000055	6000	5 - 75	55	172	100	130	90	130	35	46
CH6L	4300000056	6000	50 - 125	55	172	100	130	90	130	35	56
CH8	4300000059	8000	5 - 75	55	172	105	130	90	130	35	53
CH8L	4300000060	8000	50 - 125	55	172	105	130	90	130	35	60
CH10	4300000042	10000	5 - 100	65	215	120	150	114	130	35	95
CH10L	4300000043	10000	50 - 150	65	215	120	150	114	130	35	108
HH8	4300000178	8000	5 - 50	55	168	105	130	90	114	35	21
HH8L	4300000179	8000	50 - 100	55	168	105	130	90	114	35	28


*Per pair

*Weight for two single clamps without chains

**Smooth Jaws



* Chain slings NOT included

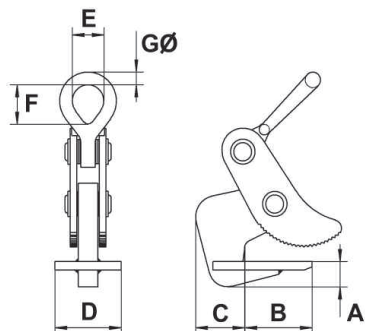

NB: The top angle between the chain / rope legs must not exceed 45° from vertical.